



# ERP22-35VL

2,200 - 3,500 kg

---

VL Series


---

SPEC SHEET


Electric Forklift Trucks



# TRUCK DIMENSIONS – VL SERIES

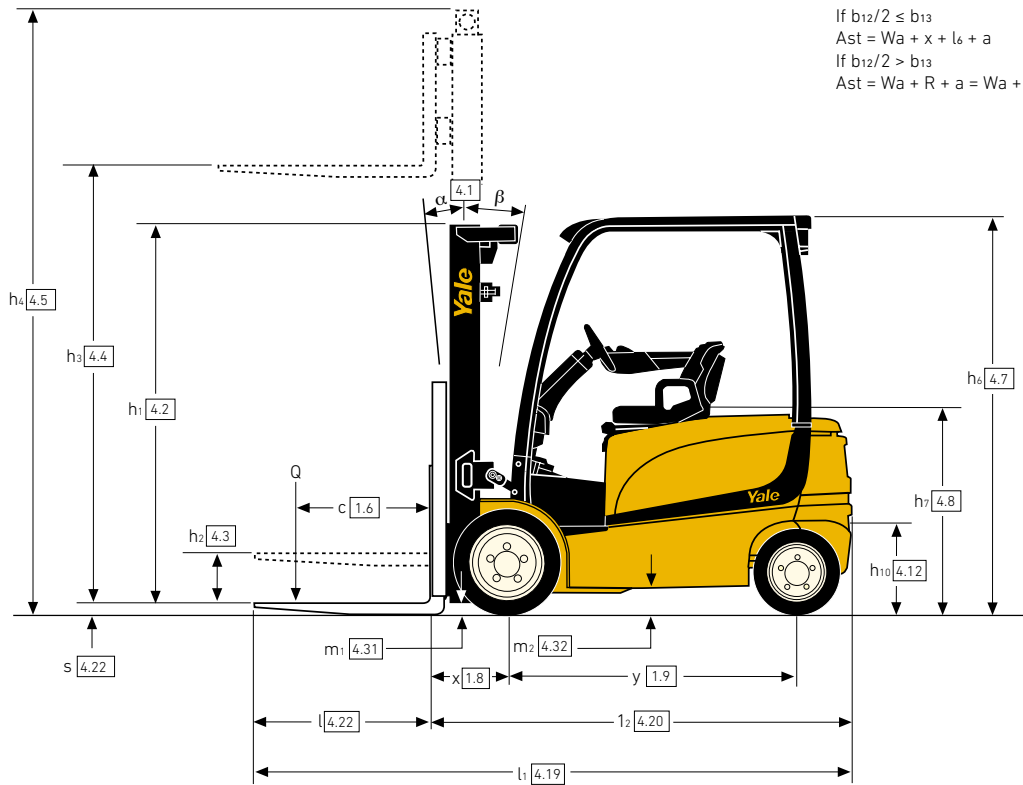


If  $b_{12}/2 \leq b_{13}$   
 $A_{st} = Wa + x + l_6 + a$   
 If  $b_{12}/2 > b_{13}$   
 $A_{st} = Wa + R + a = Wa + \sqrt{(l_6 + x)^2 + (b_{12}/2 - b_{13})^2} + a$

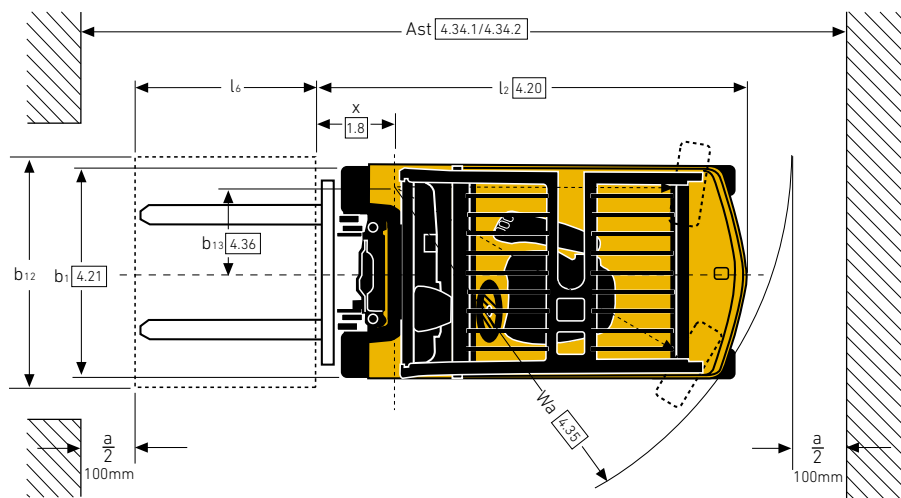


## RATED LOAD VS. LOAD CENTRE – VL SERIES

### Standard Carriage

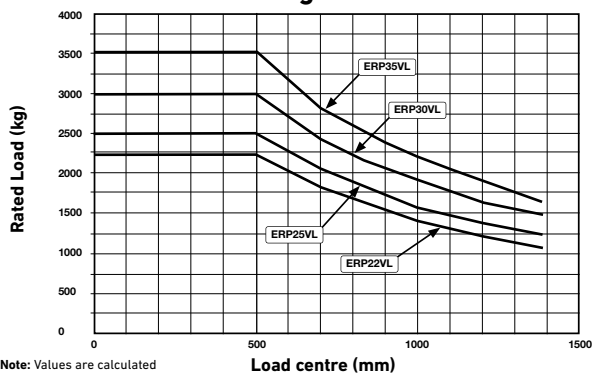

## RATED LOAD VS. LOAD CENTRE – VL SERIES

### Sideshift Carriage and Fork Positioner

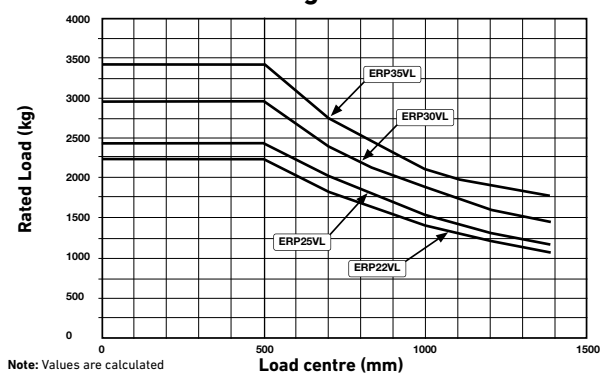

Calculations based on: 5100mm (ERP20-25 VL MWB), 4650mm (ERP25VL LWB) or 4460mm (ERP30-35 VL) 3 stage FFL mast with 1067mm standard carriage with load backrest

## VDI 2198 – GENERAL SPECIFICATIONS – VL SERIES

		Yale							
		ERP 22VL MWB		ERP 25VL MWB		ERP 25VL LWB			
GENERAL	1.1	Manufacturer							
	1.2	Model designation Model	Value	Productivity	Value	Productivity	Value		
	1.3	Drive	Electric (battery)						
	1.4	Operator type	Seated						
	1.5	Rated capacity/rated load	2.2		2.5				
	1.6	Load centre distance	500						
	1.8	Load distance, centre of drive axle to fork	419						
WEIGHT	1.9	Wheelbase	1606			1750			
	2.1	Service weight <sup>(1)</sup>	4520			4930			
	2.2	Axle loading, laden front/rear <sup>(1)</sup>	5739 / 977	5640 / 1224	6211 / 805	6114 / 1254	6283 / 1144		
TYRES	2.3	Axle loading, unladen front/rear <sup>(1)</sup>	2279 / 2236	2018 / 2646	2279 / 2236	1805 / 3063	2469 / 2458		
	3.1	Tyres front/rear	Superelastic						
	3.2	Tyre size, front	23 x 10 - 12						
	3.3	Tyre size, rear	18 x 7 - 8						
	3.5	Wheels, number front/rear (x = driven wheels)	2X / 2						
	3.6	Tread, front	b <sub>10</sub> (mm)		938 / 1054				
	3.7	Tread, rear	b <sub>11</sub> (mm)		992				
DIMENSIONS	4.1	Tilt of mast/fork carriage forward $\alpha$ /backward $\beta$	$\alpha$ / $\beta$ (°)				5 / 5		
	4.2	Height of mast, lowered	h <sub>1</sub> (mm)				2192		
	4.3	Free lift <sup>(2)</sup>	h <sub>2</sub> (mm)				100		
	4.4	Lift <sup>(2)</sup>	h <sub>3</sub> (mm)				3350		
	4.5	Height, mast extended <sup>(3)</sup>	h <sub>4</sub> (mm)				3960		
	4.7	Height of overhead guard (cabin) <sup>(4)</sup>	h <sub>6</sub> (mm)				2193		
	4.7.1	Cab height (open cab)	2206						
	4.8	Seat height/stand height <sup>(5)</sup>	h <sub>7</sub> (mm)				1070		
	4.12	Coupling height	h <sub>10</sub> (mm)				262		
	4.19	Overall length	l <sub>1</sub> (mm)			3336	3480		
	4.20	Length to face of forks <sup>(6)</sup>	l <sub>2</sub> (mm)			2336	2480		
	4.21	Overall width <sup>(7)</sup>	b <sub>1</sub> /b <sub>2</sub> (mm)				1173 / 1289		
	4.22	Fork dimensions ISO2331	s/e/l (mm)				40 / 100 / 1000		
	4.23	Fork carriage ISO 2328, class/type A,B	2A						
	4.24	Fork carriage width <sup>(8)</sup>	b <sub>3</sub> (mm)				1067		
	4.31	Ground clearance, laden, below mast	m <sub>1</sub> (mm)				83		
	4.32	Ground clearance, centre of wheelbase	m <sub>2</sub> (mm)				137		
	4.33	Load dimension b <sub>12</sub> x l <sub>6</sub> crossways	b <sub>12</sub> x l <sub>6</sub> (mm)				1200 x 1000		
	4.34	Aisle width predetermined load dimensions	Ast (mm)			3613	3750		
	4.34.1	Aisle width for pallets 1000 x 1200 crossways	Ast (mm)			3613	3750		
4.34.2	Aisle width for pallets 800 x 1200 lengthways	Ast (mm)			3766	3906			
4.35	Turning radius	Wa (mm)				1931			
4.36	Internal turning radius	b <sub>13</sub> (mm)				173			
4.41	90° intersecting aisle (With pallet W = 1200mm, L = 1000mm)	mm				1981			
4.42	Step Height (from ground to running board) <sup>(9)</sup>	mm				706 / 810			
4.43	Step Height	mm				475			
PERFORMANCE	5.1	Travel speed, laden/unladen <sup>(10)</sup>	18.0 / 18.0	21.0 / 21.0	18.0 / 18.0	21.0 / 21.0	18.0 / 18.0		
	5.2	Lift speed, laden/unladen	0.40 / 0.63	0.52 / 0.72	0.38 / 0.63	0.49 / 0.72	0.38 / 0.63		
	5.3	Lowering speed, laden/unladen	m/s				0.57 / 0.51		
	5.5	Drawbar pull, laden/unladen <sup>(11)</sup>	N	5468 / 5773	6015 / 6235	5591 / 5726	6037 / 6185	5591 / 5726	
	5.6	Max. drawbar pull, laden/unladen <sup>(12)</sup>	N	18045 / 19052	19849 / 20576	18451 / 18897	19927 / 20409	18451 / 18897	
	5.7	Gradeability, laden/unladen <sup>(13)</sup>	%		10 / 14	11 / 16	9 / 13	10 / 14	9 / 13
	5.8	Max. gradeability, laden/unladen <sup>(12)</sup>	%		26 / 39	28 / 42	24 / 35	26 / 38	24 / 35
	5.9	Acceleration time, laden/unladen <sup>(10)</sup>	s		4.42 / 4.11	4.04 / 3.71	4.45 / 4.11	4.04 / 3.71	4.45 / 4.11
	5.10	Service brake	Hydraulic						
	ELECTRIC	6.1	Drive motor rating S2 60 min	kW				2 x 10.0	
6.2		Lift motor rating at S3 15%	kW	16.0	24.0	16.0	24.0	16.0	
6.3		Battery according to DIN 43531/35/36 A, B, C, no	43536A						
6.4		Battery voltage/nominal capacity K5	(V)/(ah)			80 / 560	80 / 700		
6.5		Battery weight	kg			1480 / 1635	1770 / 1956		
6.6		Energy consumption according to VDI cycle <sup>(14)</sup>	kWh/h @ no. of cycles		6.68	7.51	7.00	7.87	7.89
OTHER	8.1	Type of drive unit	AC electronic						
	10.1	Operating pressure for attachments	bar				155		
	10.2	Oil volume for attachments <sup>(15)</sup>	l/min				20-40		
	10.3	Hydraulic oil tank, capacity	l				29.3		
	10.7	Sound pressure level at the driver's seat <sup>(16)</sup>	dB(A)		67	68	67	68	67
	10.8	Towing coupling, type DIN	Pin						

- (1) Max. battery
- (2) Bottom of forks
- (3) Without load backrest
- (4) h<sub>6</sub> subject to +/- 5mm tolerance
- (5) Full suspension in compressed position specified. Add 40mm for nominal position. Add 104mm for battery side removal option

- (6) With sideshift carriage add 32mm for ERP 22VL- ERP 25VL MWB, 34mm for ERP 25VL LWB, 33mm for ERP 30VL LWB, 32mm for ERP 35VL LWB
- (7) Standard/Wide tread
- (8) Add 28mm with load backrest
- (9) Vertical / horizontal battery removal
- (10) HiP performance settings

## VDI 2198 – GENERAL SPECIFICATIONS – VL SERIES

		Yale					
		ERP 25VL LWB	ERP 30VL LWB		ERP 35VL LWB		
GENERAL	1.1	Manufacturer					
	1.2	Model designation					
		Model	Productivity	Value	Productivity	Value	Productivity
	1.3	Drive	Electric (battery)				
	1.4	Operator type	Seated				
	1.5	Rated capacity/rated load	Q (t)	2.5	3.0	3.5	
	1.6	Load centre distance	c (mm)	500			
	1.8	Load distance, centre of drive axle to fork	x (mm)	419	431		
	1.9	Wheelbase	y (mm)	1750			
WEIGHT	2.1	Service weight <sup>(1)</sup>	kg	4930	5000		5320
	2.2	Axle loading, laden front/rear <sup>(1)</sup>	kg	6183 / 1167	7157 / 841	7055 / 1244	7871 / 942 / 7752 / 1115
	2.3	Axle loading, unladen front/rear <sup>(1)</sup>	kg	2067 / 2783	2560 / 2438	2090 / 3209	2508 / 2805 / 2209 / 3158
TYRES	3.1	Tyres front/rear	Superelastic				
	3.2	Tyre size, front	23 x 10 - 12				
	3.3	Tyre size, rear	18 x 7 - 8				
	3.5	Wheels, number front/rear (x = driven wheels)	2X / 2				
	3.6	Tread, front	b <sub>10</sub> (mm)	938 / 1054			
	3.7	Tread, rear	b <sub>11</sub> (mm)	992			
	DIMENSIONS	4.1	Tilt of mast/fork carriage forward $\alpha$ /backward $\beta$	$\alpha$ / $\beta$ (°)	5 / 5		
4.2		Height of mast, lowered	h <sub>1</sub> (mm)	2192			
4.3		Free lift <sup>(2)</sup>	h <sub>2</sub> (mm)	100			
4.4		Lift <sup>(2)</sup>	h <sub>3</sub> (mm)	3350	3155		
4.5		Height, mast extended <sup>(3)</sup>	h <sub>4</sub> (mm)	3960	3865		
4.7		Height of overhead guard (cabin) <sup>(4)</sup>	h <sub>6</sub> (mm)	2193			
4.7.1		Cab height (open cab)		2206			
4.8		Seat height/stand height <sup>(5)</sup>	h <sub>7</sub> (mm)	1070			
4.12		Coupling height	h <sub>10</sub> (mm)	262			
4.19		Overall length	l <sub>1</sub> (mm)	3480	3492	3570	
4.20		Length to face of forks <sup>(6)</sup>	l <sub>2</sub> (mm)	2480	2492	2570	
4.21		Overall width <sup>(7)</sup>	b <sub>1</sub> /b <sub>2</sub> (mm)	1173 / 1289			
4.22		Fork dimensions ISO2331	s/e/l (mm)	40 / 100 / 1000	50 / 120 / 1000		
4.23		Fork carriage ISO 2328, class/type A,B		2A	3A		
4.24		Fork carriage width <sup>(8)</sup>	b <sub>3</sub> (mm)	1067			
4.31		Ground clearance, laden, below mast	m <sub>1</sub> (mm)	83			
4.32		Ground clearance, centre of wheelbase	m <sub>2</sub> (mm)	137			
4.33		Load dimension b <sub>12</sub> x l <sub>6</sub> crossways	b <sub>12</sub> x l <sub>6</sub> (mm)	1200 x 1000			
4.34		Aisle width predetermined load dimensions	Ast (mm)	3750	3762	3828	
4.34.1		Aisle width for pallets 1000 x 1200 crossways	Ast (mm)	3750	3762	3828	
4.34.2	Aisle width for pallets 800 x 1200 lengthways	Ast (mm)	3906	3918	3984		
4.35	Turning radius	Wa (mm)	2073			2139	
4.36	Internal turning radius	b <sub>13</sub> (mm)	189				
4.41	90° intersecting aisle (With pallet W = 1200mm, L = 1000mm)	mm	2043			2076	
4.42	Step Height (from ground to running board) <sup>(9)</sup>	mm	706 / 810				
4.43	Step Height	mm	475				
PERFORMANCE	5.1	Travel speed, laden/unladen <sup>(10)</sup>	km/h	21.0 / 21.0	17.0 / 18.0	19.5 / 21.0	16.0 / 18.0 / 18.0 / 21.0
	5.2	Lift speed, laden/unladen	m/s	0.49 / 0.72	0.33 / 0.59	0.42 / 0.63	0.31 / 0.59 / 0.37 / 0.63
	5.3	Lowering speed, laden/unladen	m/s	0.57 / 0.51		0.56 / 0.46 / 0.58 / 0.46	
	5.5	Drawbar pull, laden/unladen <sup>(11)</sup>	N	6037 / 6185	5441 / 5588	5877 / 6035	5478 / 5720 / 5918 / 6177
	5.6	Max. drawbar pull, laden/unladen <sup>(12)</sup>	N	19927 / 20409	17956 / 18441	19393 / 19916	18076 / 18875 / 19522 / 20385
	5.7	Gradeability, laden/unladen <sup>(13)</sup>	%	10 / 14	8 / 12	9 / 13	7 / 12 / 8 / 13
	5.8	Max. gradeability, laden/unladen <sup>(12)</sup>	%	26 / 38	22 / 34	24 / 37	20 / 32 / 22 / 35
	5.9	Acceleration time, laden/unladen <sup>(10)</sup>	s	4.04 / 3.71	4.56 / 4.18	4.14 / 3.78	4.60 / 4.23 / 4.19 / 3.83
	5.10	Service brake		Hydraulic			
	ELECTRIC	6.1	Drive motor rating S2 60 min	kW	2x 10.0		
6.2		Lift motor rating at S3 15%	kW	24.0	16.0	24.0	16.0 / 24.0
6.3		Battery according to DIN 43531/35/36 A, B, C, no		43536A			
6.4		Battery voltage/nominal capacity K5	(V)/(ah)	80 / 700			
6.5		Battery weight	kg	1770 / 1956			
6.6		Energy consumption according to VDI cycle <sup>(14)</sup>	kWh/h @ no. of cycles	8.86	8.66	9.74	10.03 / 11.28
OTHER	8.1	Type of drive unit	AC electronic				
	10.1	Operating pressure for attachments	bar	155			
	10.2	Oil volume for attachments <sup>(15)</sup>	l/min	20-40			
	10.3	Hydraulic oil tank, capacity	l	29.3			
	10.7	Sound pressure level at the driver's seat <sup>(16)</sup>	dB(A)	68	67	68	67 / 68
	10.8	Towing coupling, type DIN		Pin			

(11) 60 minute rating

(12) 5 minute rating

(13) 30 minute rating

(14) eLo performance settings

(15) Manual hydraulics, maximum flow set through dash display

(16) LPAZ, measured according to the test cycles and based on the weighting values contained in EN12053

**Spec sheet truck based on:** 3390mm (ERP 22-25 VL) or 3200mm (ERP 30-35 VL) 2 stage LFL mast with standard carriage, 1000mm forks and load backrest with extended shift on with DIN battery configuration, standard seat and overhead guard, manual hydraulics, superelastic drive and steer tyres

**All values are nominal values and they are subject to tolerances.**

## MAST DIMENSIONS – ERP 22VL MWB

h <sub>1</sub> (mm)	h <sub>2+s</sub> (mm)	h <sub>3+s</sub> (mm)	h <sub>4</sub> (mm)	Tilt		Forks			Integral sideshift		
						Load centre (kg)			Load centre (kg)		
				F	B	500	600	700	500	600	700
2-Stage Limited Free-Lift (LFL) Mast											
2195	140	3390	3956	5	5	2200	2000	1900	2200	2000	1830
2395	140	3790	4356	5	5	2200	2000	1900	2200	2000	1820
2745	140	4330	4896	5	5	2200	2000	1890	2200	1990	1810
2995	140	4830	5396	5	5	2200	2000	1880	2190	1980	1800
2-Stage Full Free-Lift (FFL) Mast											
2195	1625	3400	3966	5	5	2200	2000	1900	2200	2000	1830
3-Stage Full Free-Lift (FFL) Mast											
2145	1595	4950	5496	5	5	2200	2000	1870	2180	1970	1790
2395	1845	5550	6096	5	5	2110	1920	1780	2070	1870	1700
2595	2045	6000	6546	5	5	2020	1830	1700	1980	1790	1630

All capacities calculated with 1000mm long forks and are less load backrest

## MAST DIMENSIONS – ERP 25VL MWB, ERP 25VL LWB

h <sub>1</sub> (mm)	h <sub>2+s</sub> (mm)	h <sub>3+s</sub> (mm)	h <sub>4</sub> (mm)	Tilt		Forks			Integral sideshift			Forks			Integral sideshift		
						Load centre (kg)			Load centre (kg)			Load centre (kg)			Load centre (kg)		
				F	B	500	600	700	500	600	700	500	600	700	500	600	700
2-Stage Limited Free-Lift (LFL) Mast																	
2195	140	3390	3956	5	5	2500	2270	2140	2490	2250	2060	2500	2270	2170	2500	2270	2090
2395	140	3790	4356	5	5	2500	2270	2130	2490	2250	2050	2500	2270	2170	2500	2270	2090
2745	140	4330	4896	5	5	2500	2270	2120	2470	2240	2040	2500	2270	2160	2500	2270	2080
2995	140	4830	5396	5	5	2480	2250	2090	2440	2210	2010	2500	2270	2150	2500	2270	2070
2-Stage Full Free-Lift (FFL) Mast																	
2195	1625	3400	3966	5	5	2500	2270	2140	2500	2600	2060	2500	2270	2170	2500	2270	2090
3-Stage Full Free-Lift (FFL) Mast																	
2145	1595	4950	5496	5	5	2440	2210	2060	2400	2170	1980	2500	2270	2140	2500	2250	2060
2395	1845	5550	6096	5	5	2310	2100	1930	2250	2030	1850	2410	2190	2050	2380	2150	1960
2595	2045	6000	6546	5	5	2210	2000	1840	2150	1940	1770	2310	2100	1960	2290	2070	1890

All capacities calculated with 1000mm long forks and are less load backrest

## MAST DIMENSIONS – ERP 30VL LWB, ERP 35VL LWB

h <sub>1</sub> (mm)	h <sub>2+s</sub> (mm)	h <sub>3+s</sub> (mm)	h <sub>4</sub> (mm)	Tilt		Forks			Integral sideshift			Forks			Integral sideshift		
						Load centre (kg)			Load centre (kg)			Load centre (kg)			Load centre (kg)		
				F	B	500	600	700	500	600	700	500	600	700	500	600	700
2-Stage Limited Free-Lift (LFL) Mast																	
2195	145	3200	3861	5	5	3000	2720	2550	2960	2680	2440	3500	3130	2680	3440	3110	2680
2395	145	3600	4261	5	5	3000	2720	2540	2950	2670	2440	3500	3130	2680	3430	3100	2680
2745	145	4100	4761	5	5	3000	2720	2530	2940	2660	2430	3500	3130	2680	3420	3090	2680
2995	145	4600	5261	5	5	2920	2650	2460	2850	2580	2360	3410	3090	2680	3330	3010	2680
2-Stage Full Free-Lift (FFL) Mast																	
2195	1535	3205	3862	5	5	3000	2720	2550	2960	2680	2440	3500	3130	2680	3440	3110	2680
3-Stage Full Free-Lift (FFL) Mast																	
2145	1500	4610	5252	5	5	2970	2690	2500	2900	2620	2390	3460	3130	2680	3470	3050	2680
2295	1650	4910	5552	5	5	2900	2630	2440	2830	2560	2340	3400	3080	2680	3300	2980	2680
2395	1750	5210	5852	5	5	2840	2570	2380	2760	2500	2280	3320 <sup>(1)</sup>	3010 <sup>(1)</sup>	2680 <sup>(1)</sup>	3220 <sup>(1)</sup>	2920 <sup>(1)</sup>	2660 <sup>(1)</sup>
2645	2000	5810	6452	5	5	2690	2440	2250	2600	2350	2150	3170 <sup>(1)</sup>	2870 <sup>(1)</sup>	2640 <sup>(1)</sup>	3060 <sup>(1)</sup>	2760 <sup>(1)</sup>	2520 <sup>(1)</sup>

(1) Wide tread required

All capacities calculated with 1000mm long forks and are less load backrest

**All values are nominal values and they are subject to tolerances.**





# About Yale®

Yale Materials Handling Corporation is one of the oldest manufacturers of lift trucks in the world. We've been in the business of lifting since 1875 and we apply that experience to help customers solve materials handling challenges. Our full line of lift trucks range in capacity from 1 to 16 tonne and are powered by internal combustion engines or electric options. Yale also offers robotic solutions, telemetry, fleet management, parts, financing and training. From traditional lift truck equipment to emerging technologies, our goal, every day, is to work with our nationwide dealer network to continually improve and provide the solutions you need, when and how you need them.

## MATERIALS HANDLING FOR:

- 3PL
- Auto Parts
- Beverage
- Cold & Frozen Foods
- Food Distribution
- Food Processing
- Furniture & Furnishings
- Health & Pharma
- Home Centres
- Retail
- E-Commerce

## Yale Lift Truck Technologies


Centennial House  
Frimley Business Park  
Frimley  
Surrey  
GU16 7SG  
United Kingdom

[www.yale.com](http://www.yale.com)



**Safety:** All Yale products sold into EU countries, UK, and Turkey conform to the EU requirements of Machinery Directive 2006/42/EC and contain **CE** marking. Yale trucks sold into other countries may be ordered for production in conformance with Machinery Directive requirements, and when so ordered will contain **CE** marking.

HYSTER-YALE UK LIMITED trading as Yale Lift Truck Technologies. Registered Address: Centennial House, Building 4.5, Frimley Business Park, Frimley, Surrey, GU16 7SG, United Kingdom. Registered in England and Wales. Company Registration Number: 02636775.

©2023 Hyster-Yale Group, Inc., all rights reserved. YALE and YALE  are trademarks of Hyster-Yale Group, Inc. Trucks may be shown with optional equipment and/or features not available in all regions. Truck performance may be affected by the condition of the vehicle, how it is equipped and the application. Specifications are subject to change without notice.

**Notice:** Care must be exercised when handling elevated loads. Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual. Consult your Yale® Dealer if any of the information shown is critical to your application.

Publication part no. 220991876 Rev.00 (0323DMS) EN